


# DURA SLOPE™ GRATES

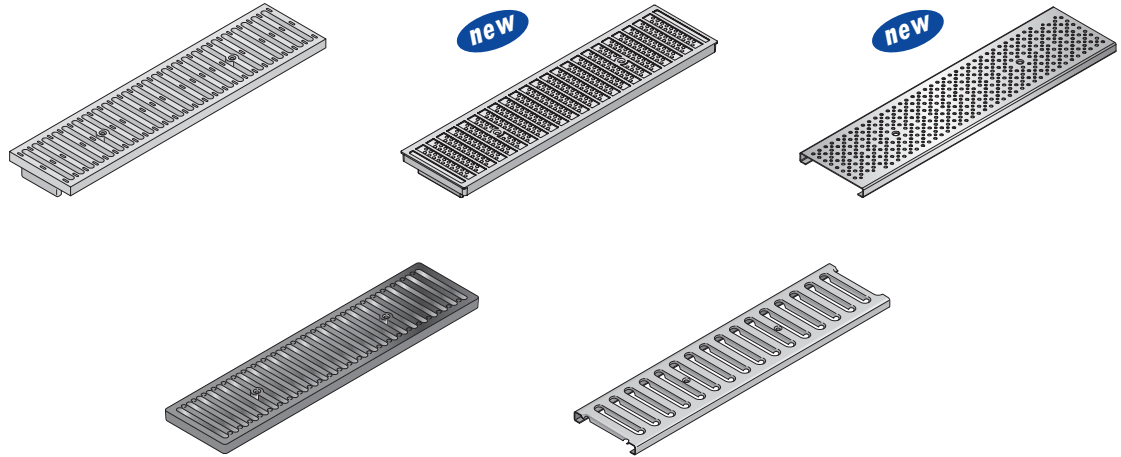

Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Inflow Capacity (GPM)	Specifications
660	2 ft. Channel Grate	White	12	2.92	27	NDS #660, #661, #662, #663, #664, #665, 2 ft. Structural Foam Polyolefin secured channel grate with UV inhibitor. Open surface area of 20.61 square inches per foot. 27.00 GPM per foot.
661	2 ft. Channel Grate	Dark Gray	12	2.92	27	
661LG	2 ft. Channel Grate	Gray	12	2.92	27	
662	2 ft. Channel Grate	Green	12	2.92	27	
663	2 ft. Channel Grate	Black	12	2.92	27	
664	2 ft. Channel Grate	Sand	12	2.92	27	
665	2 ft. Channel Grate	Brick Red	12	2.92	27	
DS-670	2 ft. Plastic Perforated Channel Grate	Gray	12	3.0	11.3	NDS #DS-670, 2' Structural Foam Polyolefin, secured channel grate with UV inhibitors; light traffic rated, heel-proof, ADA compliant. Open surface area of 9.36 square inches per foot; 12.2 GPM per foot.
DS-226	2 ft. Stainless Steel Perforated Channel Grate	Steel	12	3.22	9.6	NDS #DS-226, Stainless Steel grate, light traffic rated, heel-proof, ADA compliant. Open surface area of 7.92 square inches per foot; 10.4 GPM per foot.
DS-228	2 ft. Galvanized Steel Perforated Channel Grate	Steel	12	3.22	9.6	
DS-231	2 ft. Cast Iron Channel Grate	Black	1	15.00	22.6	#DS-231 2 ft. Heavy Duty Cast Iron Channel Grate. NDS #DS-232, 2 ft. Heavy Duty Ductile Iron Channel Grate. Open surface area of 15.27 square inches per foot; 20.00 GPM per foot. H-20 Load Rating.
DS-232	2 ft. Ductile Iron Channel Grate	Black	1	16.00	22.6	
DS-221	2 ft. Galvanized Steel Channel Grate	Steel	12	4.00	31.4	NDS #DS-221, 2 ft. Galvanized Rolled Steel Grate. Open surface area of 19.85 square inches per foot; 26.00 GPM per foot.

ADA Compliant

Use with Dura Slope Drains and Dura Slope Catch Basins