



P: 646-227-0910
info@swift drain.com

Your #1 Source for Trench Drain Products

8" wide Ductile Iron Trench Drain Kit

12 feet

Built to last. Designed with strength in mind.

This kit comes with heavy duty 8" wide ductile iron grates that comes in 20" sections. The grate can easily be removed to clean the drain. The load bearing is class C, H-20 load bearing for cars, pedestirans and trucks. Versatile, easy to assemble, strong, durable and tough. Drainage that lasts.

These cast iron grates are every engineer and design teams dream. Made in ductile iron, they are capable of withstanding the heaviest loads. Designed to last for decades.

The most durable and long lasting grate used today.

Overview

| | |
|--------------|-----|
| Grate Width: | 8" |
| Thickness: | ¾" |
| Sections: | 20" |



P: 646-227-0910
info@swift drain.com

Your #1 Source for Trench Drain Products

Specifications Package

8" Wide Ductile Iron Trench Drain Grate




| | |
|--------------|----------------------------|
| Grate Width: | 8" |
| Thickness: | 3/4" |
| Sections: | 20" |
| Class: | Class C for heaviest loads |
| Material: | Ductile Iron, Cast Iron |
| Open Area: | 40 sq in / ft |
| Inflow: | 50 GPM / FT |
| H2O: | Yes |



P: 646-227-0910
info@swift drain.com

Your #1 Source for Trench Drain Products

8" Pro Series Grate

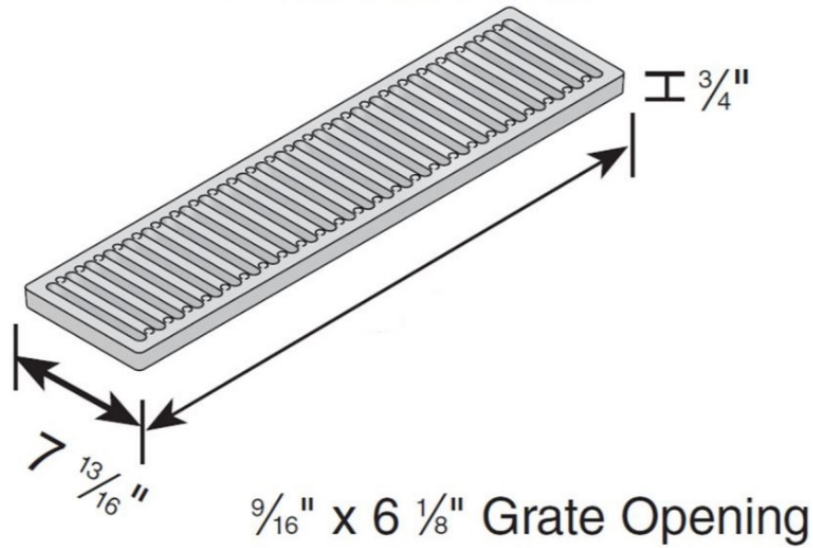

Material: Cast Iron
Color: Black/Cast Iron

Grate Opening: $\frac{9}{16}$ " x $6 \frac{1}{8}$ "
Open Surface Area: 23.3 Sq. Inches Per Foot.
Head Pressure / Flow rate:
3" = 174.59 GPM per Foot.
1" = 100.8 GPM per Foot
0.5" = 71.28 GPM per Foot



Class C

- Loads of 176-325 psi.
- Recommended for heavy-duty pneumatic tire forklifts and tractor trailers at speeds less than 20 m.p.h., H-20 rated.



P: 646-227-0910
info@swift drain.com

Your #1 Source for Trench Drain Products

End Cap / End Outlet



12 foot kit comes complete with:

7 Ductile Iron Grates

7 Polymer Channels

1 End Cap

1 End Outlet

Accessories Kit