


# Swiftdrain 600

## Channel Depths

### Channel Details and Dimensions

Part - Ref.	Depth - in inches - neutral channels have no slope	Flow Rate Gallons per minute	Minimum Inner Depth in inches	Maximum Inner Depth in inches	Minimum Outer Depth in inches	Maximum Outer Depth in inches	Weight in LBS
600	3.99" Deep	76	3.998	3.998	5.354	5.761	7.50
691	3.99" to 4.34" Deep	74	3.998	3.998	5.690	5.771	7.50
691N	4.34" Deep Neutral Slope Channel	87	4.334	4.334	5.692	6.102	7.85
692	4.34" to 4.67" Deep	87	4.334	4.670	6.062	6.105	7.91
693	4.67" to 5.00" Deep	102	4.670	5.006	6.362	6.443	8.25
694	5.00" to 5.34" Deep	116	5.006	5.342	6.698	6.779	8.67
694N	5.34" Deep Channel	132	5.342	5.342	6.700	7.112	8.90
695	5.34" to 5.68" Deep	132	5.342	5.678	7.034	7.113	8.95
696	5.68" to 6.01" Deep	146	5.678	6.014	7.370	7.451	9.34
697	6.01" to 6.35" Deep	158	6.014	6.350	7.706	7.787	9.72
697N	6.35" Deep Neutral	172	6.350	6.350	7.708	8.112	10.03
698	6.35" to 6.69" Deep	172	6.350	6.686	8.042	8.123	10.12
699	6.69" to 7.02" Deep	188	6.686	7.022	8.378	8.456	10.44
700	7.02" to 7.36" Deep	200	7.022	7.358	8.714	8.793	10.82
700N	7.36" Deep Neutral	216	7.358	7.358	8.716	9.122	11.12
701	7.36" to 7.69" Deep	216	7.358	7.694	9.050	9.135	11.24
702	7.69" to 8.03" Deep	228	7.694	8.030	9.386	9.466	11.61
703	8.03" to 8.37" Deep	242	8.030	8.366	9.722	9.802	11.93
703N	8.37" Deep Neutral	258	8.366	8.366	9.724	10.136	12.24
704	8.37" to 8.70" Deep	258	8.366	8.702	10.058	10.134	12.32
705	8.70" to 9.04" Deep	270	8.702	9.038	10.394	10.521	12.72
706	9.04" to 9.37" Deep	286	9.038	9.374	10.730	10.812	13.05
706N	9.37" Deep Neutral	300	9.374	9.374	10.732	11.142	13.38
707	9.37" to 9.70" Deep	300	9.374	9.710	11.066	11.145	13.4
708	9.70" to 10.05" Deep	314	9.710	10.046	11.402	11.486	13.82
709	10.05" to 10.38" Deep	326	10.046	10.382	11.738	11.812	14.21
709N	10.38" Deep Neutral	340	10.382	10.382	11.740	12.154	14.49
710	10.38" to 10.71" Deep	340	10.382	10.718	12.074	12.153	14.53
711	10.71" to 11.05" Deep	354	10.718	11.054	12.410	12.491	14.94
712	11.05" to 11.39" Deep	367	11.054	11.390	12.746	12.892	15.33
712N	11.39" Deep Neutral	381	11.390	11.390	12.785	13.153	15.6
713	11.39" to 11.72" Deep	381	11.390	11.726	13.082	13.167	15.84
714	11.72" to 12.06" Deep	395	11.726	12.062	13.418	13.499	16.05

Install Covers

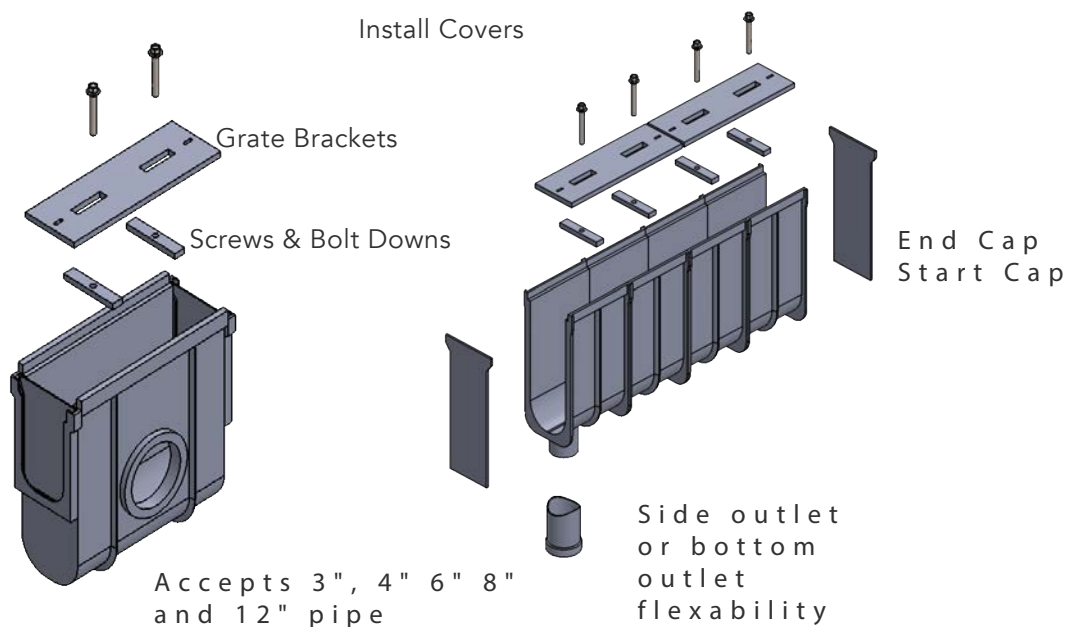

Inline Catch Basin

6" wide  
28" deep  
2 Outlet  
Exit  
Knockouts

Seamless

Accepts 3", 4" 6" 8"  
and 12" pipe

Side outlet  
or bottom  
outlet  
flexibility